Vale-D free standing luminaires

20.018.34006

GENERAL

Floor
Standing
Silver
IP20
indirect 11500 lm
direct 7700 lm
total 19200 lm
Beam Angle ↑110°/90°↓
UGR<17

LED

4000K neutral white
CRI ≥ 80
L80(B10)50,000H
SDCM <3

PHYSICAL

length 1500 mm
width 494 mm
height 2000 mm
21.8 kg

ELECTRICAL

160W
120 lm/W
AC200~240V

IP20 | UGR <17 | 110° 90°

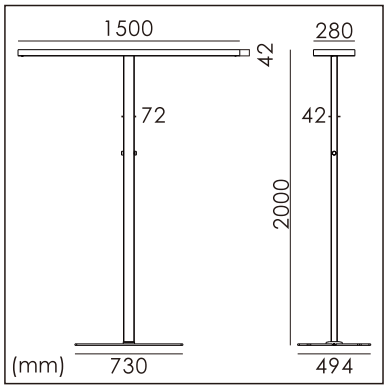

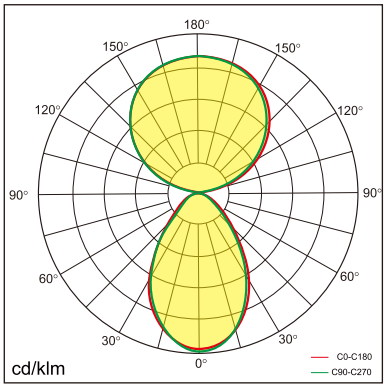

The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K, Product illustrations serve as examples and may differ from the original. No liability is assumed for typographical or printing errors. We reserve the right to make alterations in the interest of improving our products.