

21.001.23004



GENERAL

Desktop
Standing
White
IP20
indirect 7200 lm
direct 2400 lm
total 9600 lm
Beam Angle $\uparrow 140^\circ / 75^\circ \downarrow$
UGR < 12

LED



3000K warm white
CRI ≥ 80
L80(B10)50,000H
SDCM < 3

PHYSICAL

length 1203 mm
width 52 mm
height 1200 mm
4 kg

ELECTRICAL

80W
120 lm/W
AC200~240V

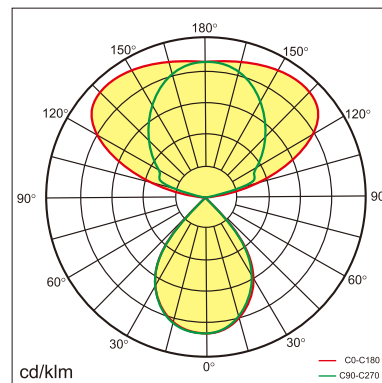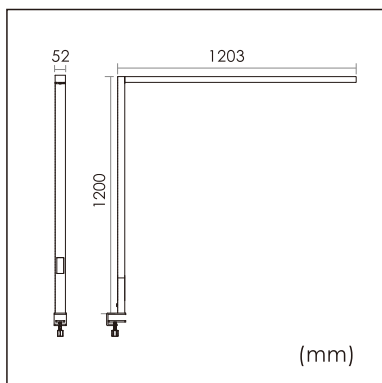

The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. Product illustrations serve as examples and may differ from the original. No liability is assumed for typographical or printing errors. We reserve the right to make alterations in the interest of improving our products.