

22.014.14008



### GENERAL

Ceiling  
Suspended  
black  
IP20  
indirect 1800 lm  
direct 3500 lm  
total 5300 lm  
Beam Angle  $\uparrow$ 110°/80° $\downarrow$   
UGR<21

### LED



4000K neutral white  
CRI  $\geq$  80  
L80(B10)50,000H  
SDCM <3

### PHYSICAL

length 1204 mm  
width 44 mm  
height 75 mm  
2.85 kg

### ELECTRICAL

48W  
110 lm/W  
1-10V Dimming  
AC200~240V

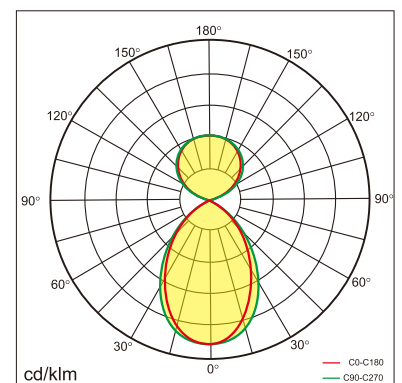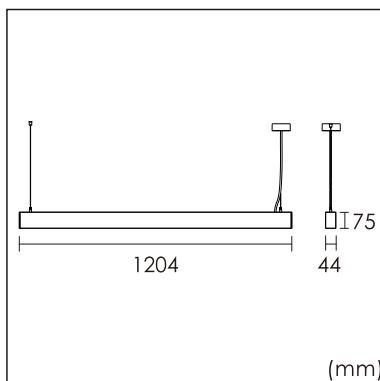

The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. Product illustrations serve as examples and may differ from the original. No liability is assumed for typographical or printing errors. We reserve the right to make alterations in the interest of improving our products.