Siv-P pendant luminaires

22.008.23045

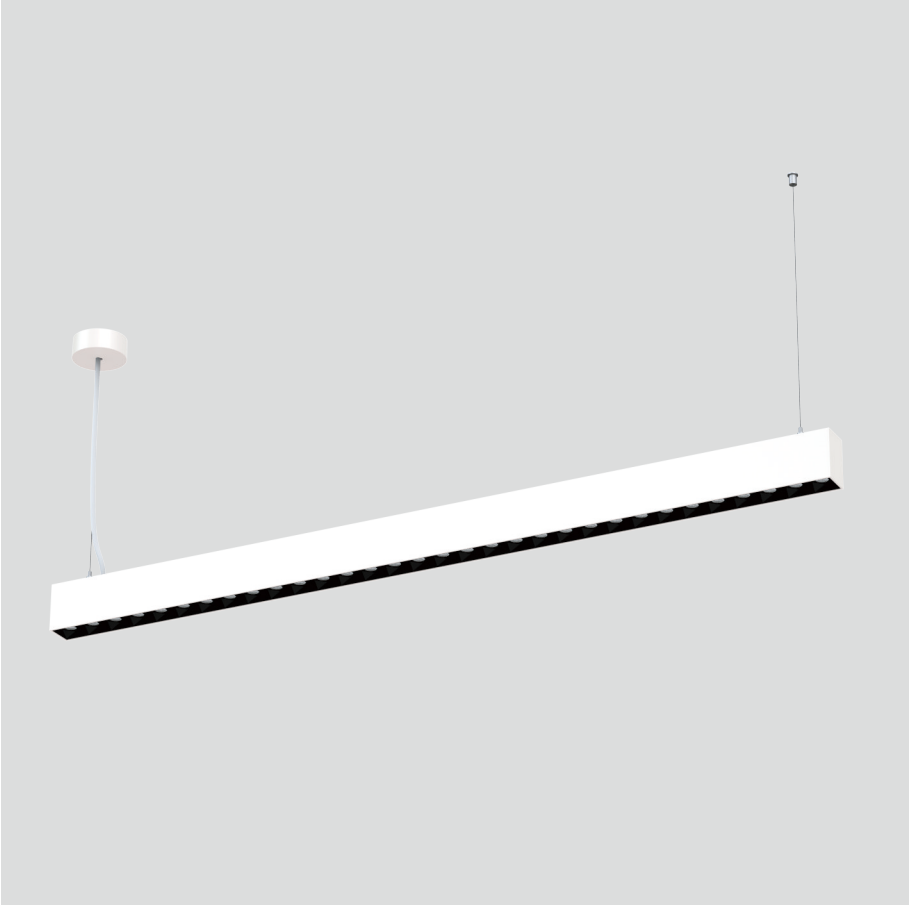

GENERAL
Ceiling
Suspended
White
IP20
indirect 5050 lm
direct 4050 lm
total 9100 lm (SMD5050)
indirect 4100 lm
direct 3300 lm
total 7400 lm (SMD2835)
Beam Angle ↑140°/50°↓
UGR<15

LED
3000K warm white
CRI ≥ 80
L80(B10)50,000H
SDCM <3

PHYSICAL
length 1488 mm
width 48 mm
height 76 mm
3.7 kg

ELECTRICAL
70W
130 lm/W
1-10V Dimming
AC200~240V

CE RoHS IP20 UGR <15 140° 50°

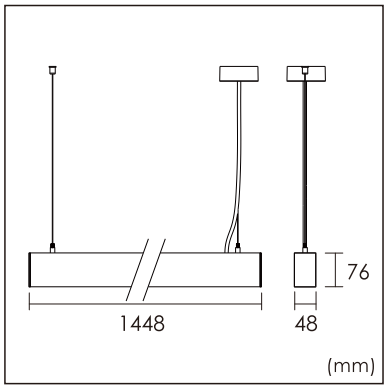

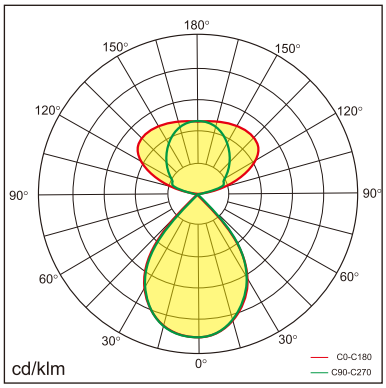

The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K, Product illustrations serve as examples and may differ from the original. No liability is assumed for typographical or printing errors. We reserve the right to make alterations in the interest of improving our products.