

25.001.33035



GENERAL

Wall
Surface
Silver
IP20
6000 lm
UGR<19

LED


3000K warm white
CRI ≥ 80
L80(B10)50,000H
SDCM <3

PHYSICAL

length 1810 mm
width 51 mm
height 85 mm
4.3 kg

ELECTRICAL

DALI Dimming
50W
130 lm/W
AC200~240V

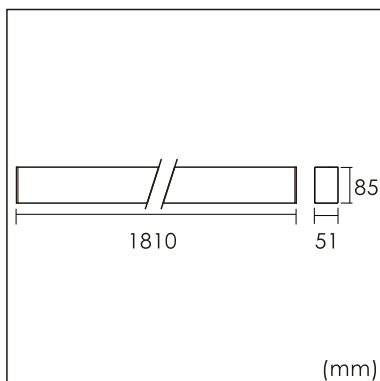

The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. Product illustrations serve as examples and may differ from the original. No liability is assumed for typographical or printing errors. We reserve the right to make alterations in the interest of improving our products.