

# Ymer-C

Surface mounted luminaires



23.001.13031



## GENERAL

Ceiling  
Surface  
black  
IP20  
indirect 1500 lm  
direct 4800 lm  
total 6300 lm  
Beam Angle  $\uparrow 115^\circ / 80^\circ \downarrow$   
UGR<19

## LED



3000K warm white  
CRI  $\geq 80$   
L80(B10)50,000H  
SDCM <3

## PHYSICAL

length 1500 mm  
width 240 mm  
height 32.8 mm  
5.1 kg

## ELECTRICAL

60W  
105 lm/W  
DALI Dimming  
AC200~240V

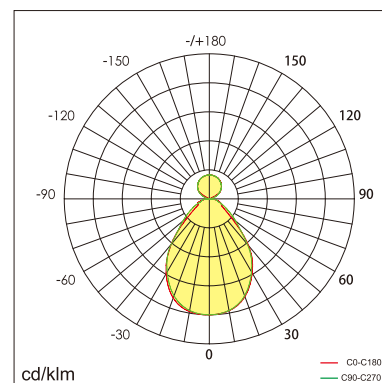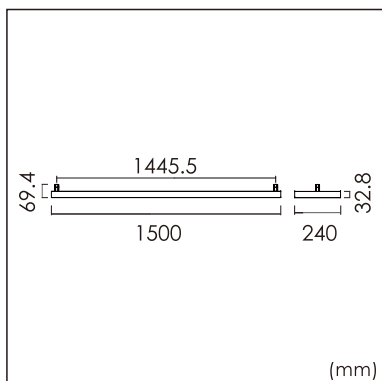

The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. Product illustrations serve as examples and may differ from the original. No liability is assumed for typographical or printing errors. We reserve the right to make alterations in the interest of improving our products.